

# LTC6AUTPCM85

LAN Cable CAT6a Solid UTP CM

## Conductor

- 23 AWG Bare Solid Copper
- Insulation: HD-PE
- PVC Jacket available
- ROHS / Reach compliant

## Applications


- 10G Base-T, 1000 Base-T (IEEE802.3ab)
- Telephone and other communication circuits such as voice, data and audio for on-premise customer systems.

## Industry Standards

- UL/CSA Listed CMR
- Verified to ANSI/TIA-568-C.2 CAT.6A

## Specifications

Electrical Specifications	
Impedance	100 ± 15 Ω (1-600 mHz)
Pair to Ground	330Pf/100m Max.
Propagation Delay Skew	45ns/100m
Dielectric Strength	AC-500V/1 Min

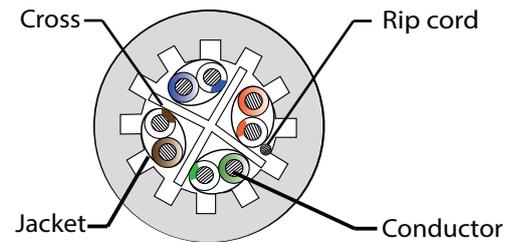

Cat 6a UTP



Connectors are SOLD separately.  
Product specifications are subject to change without prior notice.  
For more information, visit [www.lamatel.ca](http://www.lamatel.ca) or send an email to [sales@lamatel.com](mailto:sales@lamatel.com).